

STOPDIGGING!®




ADAPTER SCREW



The adapter screw has a mounting plate with a series of slots that allow for precise adjustment in several directions and is therefore suitable for structures requiring a great deal of accuracy. This model takes a wide range of attachments including the beam bracket, post bracket, plate and L-support which make it a very versatile support. There is almost nothing we cannot securely attach! This makes it ideal for a variety of structures such as living quarters on construction sites, sound dampening boards, greenhouses, solar cells and prefabricated houses. The adapter screw is available in two different designs.

SGP	580	865	1200
SCREW LENGTH	580 mm	865 mm	1200 mm
OUTER DIAMETER	67 mm		
PLATE	95x70 mm		
COMPRESSION CAPACITY	2,5 kN	6 kN	12,5 kN
TENSILE CAPACITY	1,7 kN	4,5 kN	6,5 kN
LATERIAL CAPACITY	0,5 kN	2,5 kN	4,5 kN

EXAMPLE OF USES AREAS

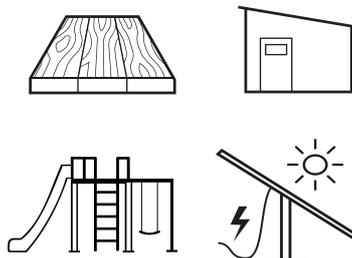

EXPECTED
MINIMUM
SERVICE LIFE
100
YEARS*

