


STOPDIGGING!®

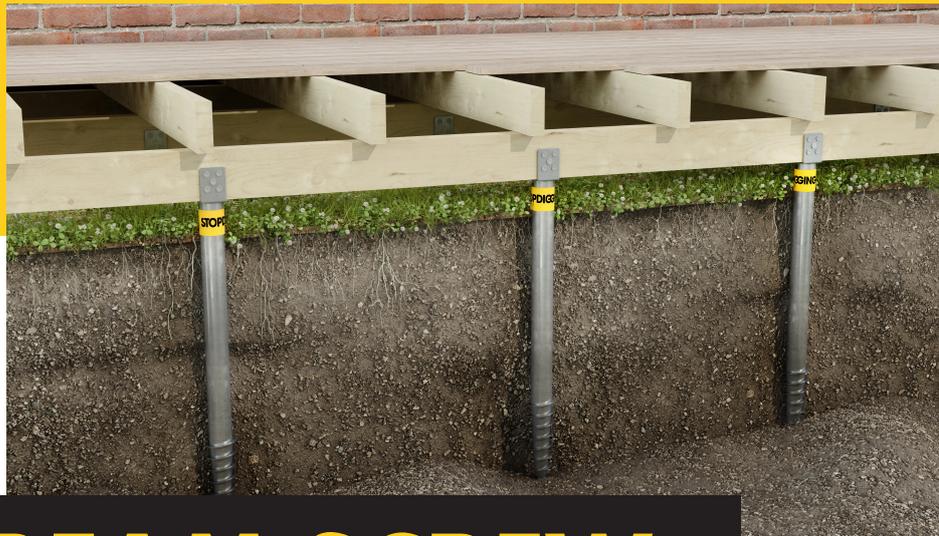

BEAM SCREW


Our beam screws are perfect for supporting frames and joists in a variety of constructions, for example the joists in a garden deck.

The screw head has a mounting slot of 95 mm wide to fit most standard dimensions of timber. The screws are available in two thicknesses and five lengths, which makes it possible to maintain a level bead on uneven ground without losing stability. The beam screw shoe has a strong U-profile with five screw holes per side for a secure fastening of joists, studs and other beams. Forget the cumbersome level adjustment of concrete posts, this screw makes keeping a level a doddle.



SGU	95x580	95x865	95x1000	95x1200	95x1600
SCREW LENGTH	580 mm	865 mm	1000 mm	1200 mm	1600 mm
OUTER DIAMETER	40 mm	67 mm			
PROFILE HEIGHT	100 mm				
PROFILE WIDTH	95 mm				
COMPRESSION CAPACITY	2,5 kN	6 kN	10,5 kN	12,5 kN	17,5 kN
TENSILE CAPACITY	1,7 kN	4,5 kN	5,5 kN	6,5 kN	8 kN
LATERAL CAPACITY	0,5 kN	2,5 kN	3,5 kN	4,5 kN	7,0 kN

EXAMPLES OF USES



EXPECTED
MINIMUM
SERVICE LIFE
100
YEARS*

